


Conductor Spools

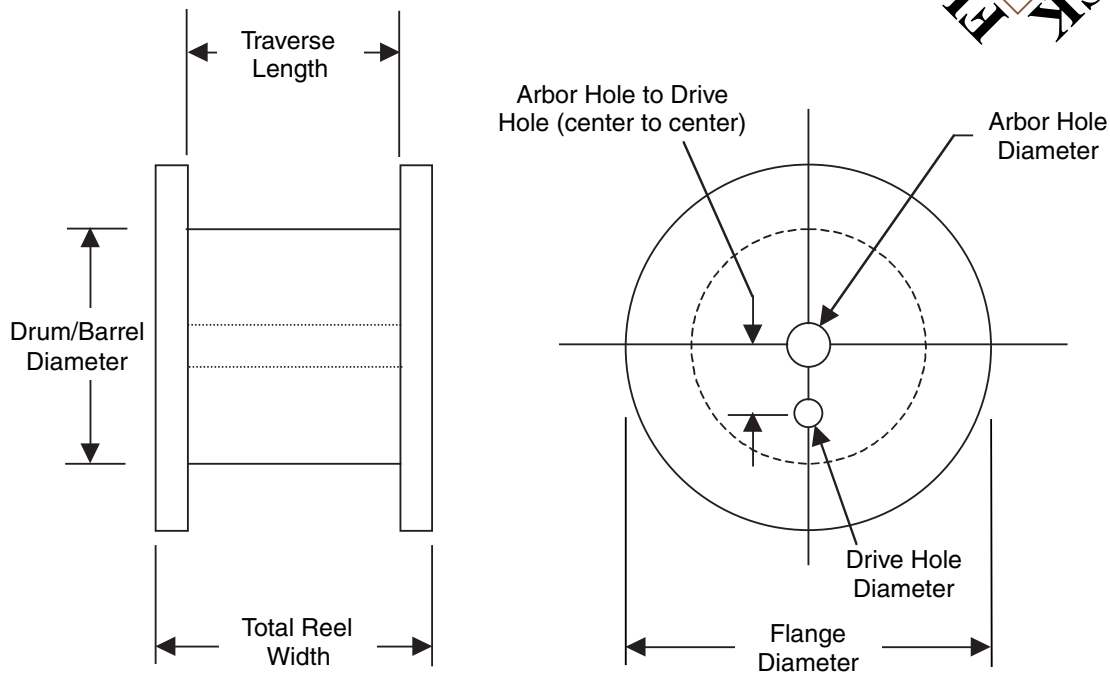

Spool Type	P/N	Flange Diameter	Traverse Length	Arbor Hole Diameter	Drum/Barrel Diameter	Total Reel Width	Drive Hole Diameter	Arbor to Drive Distance	Nominal Cap. (lbs.)	Approx. Wt. (lbs.)
22" Plastic	P22x11	22.000	11.000	5.000	14.000	14.000	0.750	note ^a	375	33.0
16" Plastic	P16x8x1	16.000	8.000	1.250	8.750	10.500	1.500	2.625	125	11.5
12" Plastic	P12x7x1	11.875	7.000	1.250	6.500	8.000	1.250	2.000	50	2.8
8" Plastic (3")	P8x6	8.000	6.000	3.000	4.500	7.375	0.375	1.930	25	1.4
8" Plastic (1 1/4")	P8x6x1	8.000	6.000	1.250	4.500	7.375	0.375	1.930	25	1.6
6" Plastic	P6x3.5x5/8	6.000	3.500	0.625	3.500	4.250	0.750	0.937	8	0.65
DIN 250 Plastic	DIN250	9.842	6.300	3.000 ^b	6.250	7.874	0.375	3.750	45	3.0
DIN 200 Plastic	DIN200	7.874	6.300	0.866 ^b	5.315	7.874	0.500	note ^c	25	1.6
DIN 160 Plastic	DIN160	6.250	5.000	0.630 ^b	4.000	6.250	0.500	1.000	15	1.0
DIN 125 Plastic	DIN125	4.921	3.937	0.630 ^b	3.150	4.921	0.276	0.787 ^d	6	0.55
24C Bobbin	24Carrier	2.600	4.200	0.650	1.380	4.600	N/A	N/A	2.5	0.20
16C Bobbin	16Carrier	2.600	2.840	0.650	1.380	3.250	N/A	N/A	1.5	0.14

Notes: a - Slot for 0.75" drive pin, located at 3.375" to 4.875" from arbor (center to center)
 b - Tapered arbor hole
 c - Drive holes located 1" and 1.25" from arbor (center to center)
 d - Additional slot which can accommodate a 0.276" (7 mm) drive pin, located 0.5" (11-13 mm) from arbor (center to center)

All dimensions are in inches.
For other spool types, please contact our sales department.